

# Hydraul- / smöroljesystem

Analoga tryckmätare



Manometrar



Tryckvakter




Diff.tryckvakter



Flödesvakter



Nivåflottörvakt med integrerad temp.vakt

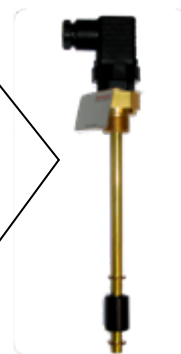

Magnetiska nivåställ



Vidare produktinformation



**Teddington AB**  
Speditionsvägen 17  
SE-142 50 Skogås-Sthlm, Sweden

Tel:+46 (0)8-505 207 60  
Fax:+46 (0)8-505 207 69

info@teddington.se  
www.teddington.se

# Nivåvakt i miniatyrformat


## Level switch

with BN18-float

and bimetal temperature switch

- The perfect fit level and temperature switch for hydraulic tanks with a tank screws dimension of G $\frac{1}{2}$ " or M20x1,5 mm thread (female) or similar ( $\frac{1}{2}$ " NPT).

(min. core diameter: 18 mm = float outside diameter)

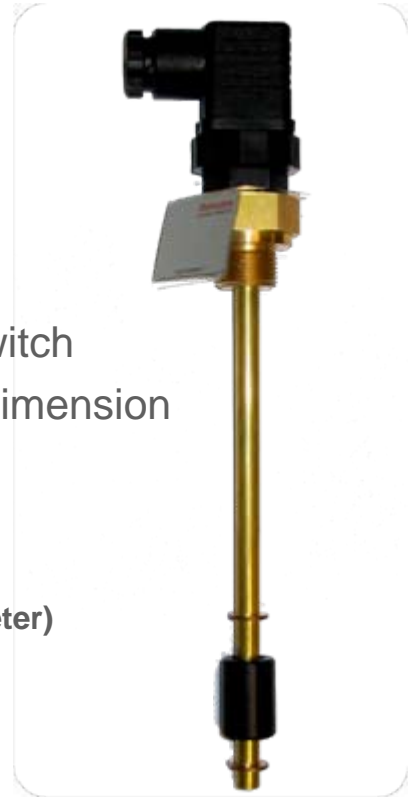

# Nivåvakt med justerbara brytnivåer

Take out\* of whole stem including the print and reed switches

\* = also after the mounting if using a correction of the switch point and contact type (NO/NC)

You can disconnect the reed switches pour change the position or change in case of damage



## Technical Data

- Max. operating pressure: 3 bar
- Max. operating temperature: -20 to +70°C
- Min. density of liquid: 0,80 g/cm<sup>3</sup>
- Position: vertical,  $\pm 30^\circ$ , top or bottom
- Protection class: M12x1mm /junction box
- Float (905-0030): PE, Cylinder-Ø: 33 mm
- Float (705-0002): VA, Cylinder-Ø: 44 mm

